

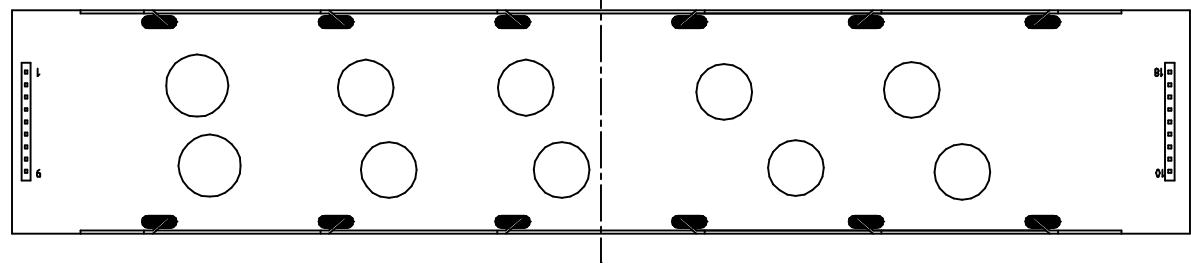
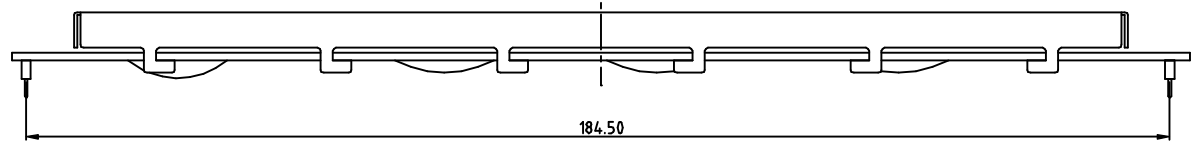
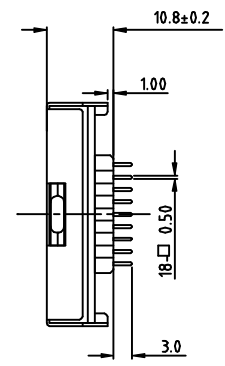


REV	Description	Date
A01	Change Design	2005-SEP-12

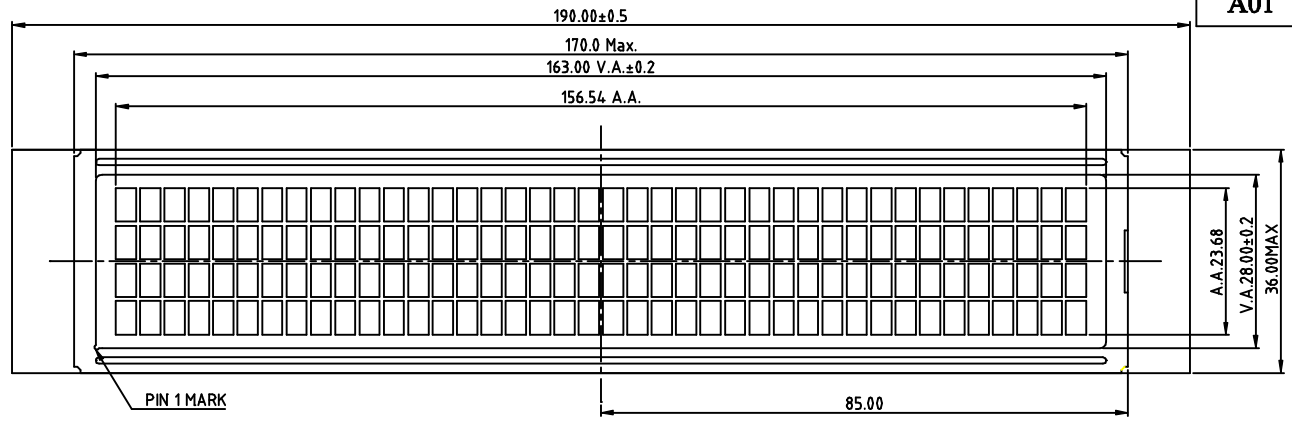

PIN ASSIGNMENT:

Pin#	Name:
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E1(1,2 rows)
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	E2(3,4 rows)
16	LED+
17	N.C.
18	LED-

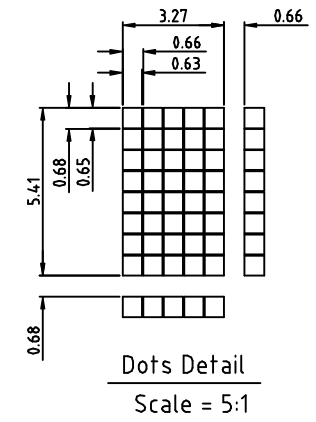

- SPECIFICATIONS:
- 1) STN/+VE/GRAY/TRANSFLECTIVE MODE
 - 2) 1/16 DUTY, 1/5 BIAS, VOP=4.5V
 - 3) VIEWING ANGLE=12 O'CLOCK
 - 4) OP.TEMP.= 0°C TO +50°C
ST.TEMP.= -10°C TO +60°C
 - 5) WITH Y-G LED BACKLIGH, 4.05V@300mA

Description: MECHANICAL SPECIFICATIONS

Scale: Sheet : 1 of 1


Unspecified Tol. ±0.3 Unit mm

Approvals Date Project Number Item Number

Draw: TMBC40465BSP-01

Check: Do Not Scale This Drawing

Approve: Projection



TRI-T COMPANY LIMITED

