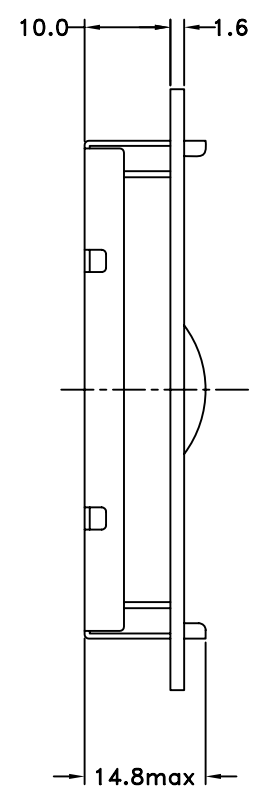
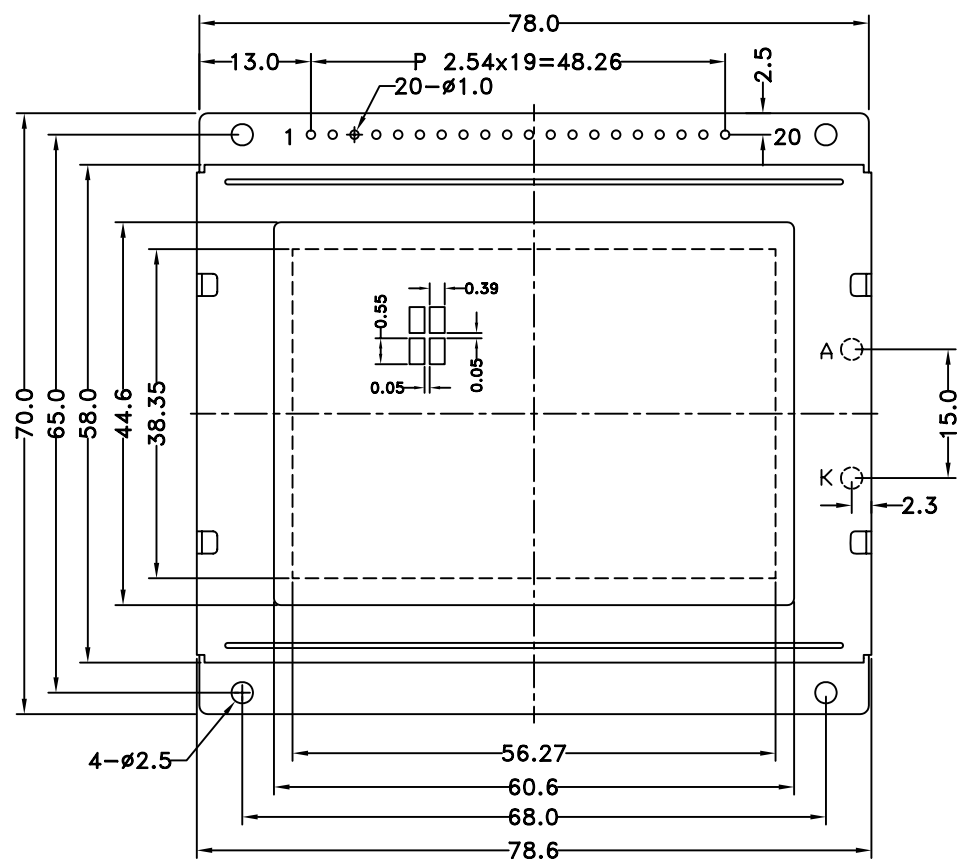


REV	Description	Date
A00	First Issue	2002-NOV-4





PIN ASSIGNMENT:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19.A	20.K
FG	V _{SS}	V _{CC}	V _O	/WR	/RD	/CE	C/D	/RST	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	FS	LED+	LED-

SPECIFICATION:

- 1) STN/+VE/Y-G/TRANSFLECTIVE MODE
- 2) 1/64 DUTY, 1/9 BIAS, V_{op}=8.8V
- 3) VIEWING ANGLE=6 O'CLOCK
- 4) OP.TEMP.=0°C TO +50°C
ST.TEMP.=-10°C TO+60%DC
- 5) WITH Y-G LED BACKLIGHT, 4.05V@350mA

Description: MECHANICAL SPECIFICATIONS	
Scale:	 TRI-T COMPANY LIMITED
Sheet : 1 of 1	
Unspecified Tol. ±0.3	Unit mm
Approvals	Date
Draw:	Project Number
Check:	TMBG12864T-XX
Approve:	Do Not Scale This Drawing
Item Number	
 Projection	