




REV	Description	Date
A00	First Issue	2008-JUL-15

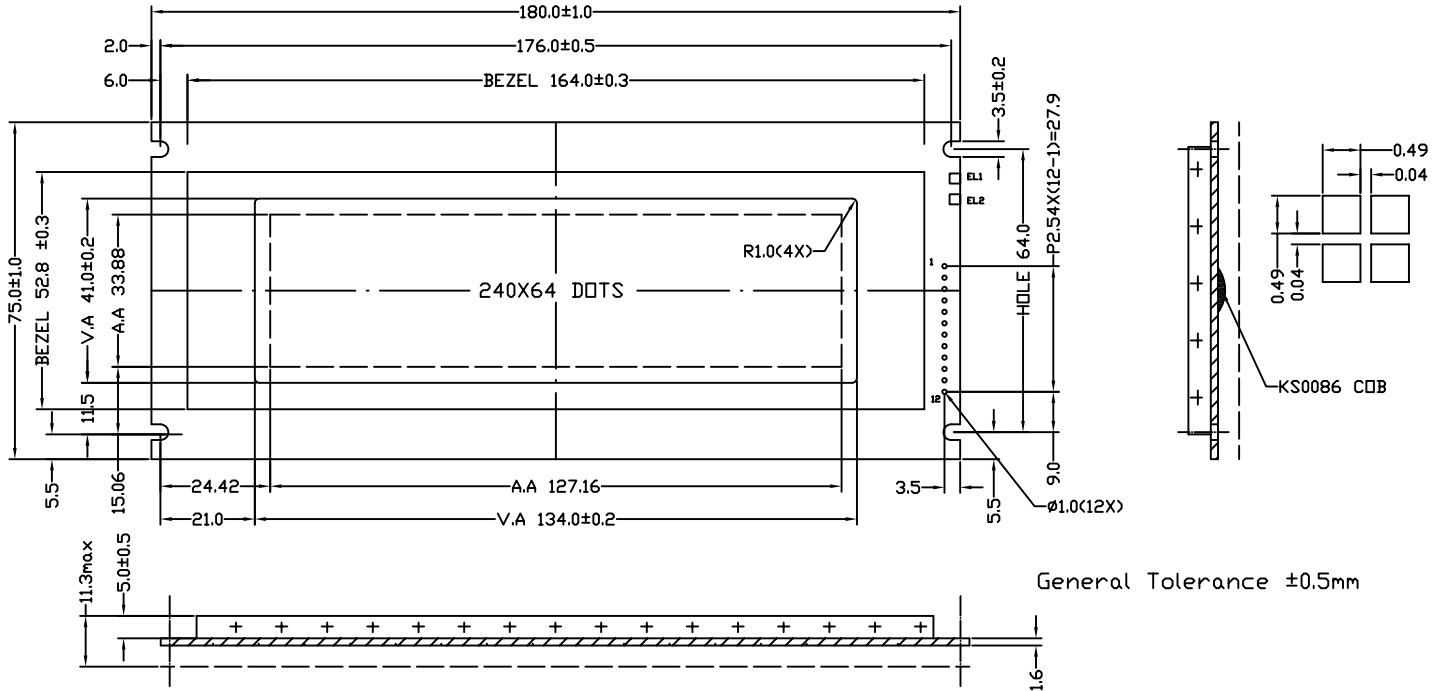

General Tolerance ±0.5mm

1	2	3	4	5	6	7	8	9	10	11	12
D3	D2	D1	D0	FLM	M	CL1	CL2	VDD	VSS	V \square	VLC

- Specification:
- 1)STN,+Ve/Y-G/Transflective
 - 2)Duty 1/64, Bias 1/9, Vop:12.5V
 - 3)Operating Temp:0°C to +50°C,
Storage Temp:-20°C to +60°C
 - 4)Viewing direction: 6 o'clock
 - 5) With Y-G LED backlight, 4.05V@630mA
 - 6)With Built-in DC/DC Converter

Description:		MECHANICAL SPECIFICATIONS	
Scale:		 TRI-T COMPANY LIMITED	
Sheet : of			
Unspecified Tol.	Unit mm	Project Number TMBG24064C-05	Item Number
Approvals	Date		
Draw:		Do Not Scale This Drawing	 Projection
Check:			
Approve:			