


REV	Description	Date
A00	First Issue	2008-SEP-162

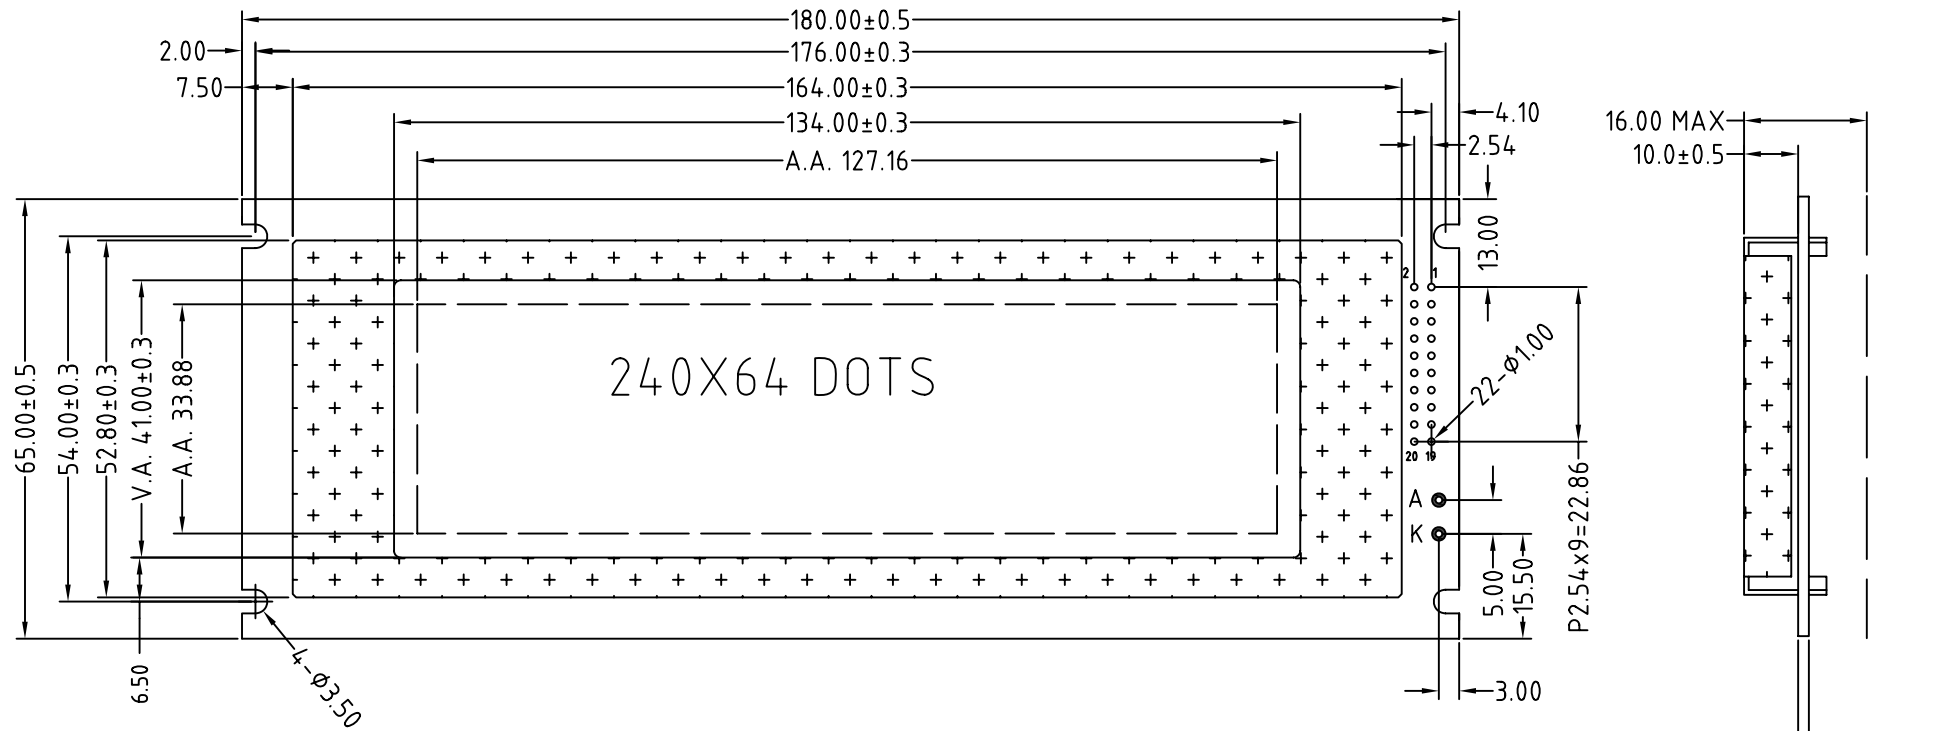




PIN ASSIGNMENT

PIN#	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	A	K
NAME	FG	VSS	VDD	V0	/WR	/RD	/CE	C/D	NC	/RST	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	FS	NC	LED+	LED-

Specifications:

- 1)STN/+Ve/Y-G/Transflective Mode
- 2)Duty 1/64, Bias 1/9, Vlcd:14.8V
- 3)Operating Temp:-20°C to +70°C,
Storage Temp:-30°C to +80°C
- 4)Viewing direction: 6 o'clock
- 5) WithY-G Color LED backlight



Description: MECHANICAL SPECIFICATIONS	
Scale:	 TRI-T COMPANY LIMITED
Sheet : 1 of 1	
Unspecified Tol. ±0.3	Unit mm
Approvals	Date
Draw:	Project Number
Check:	TMBG24064T-04A
Approve:	Item Number
Do Not Scale This Drawing	
 Projection	