


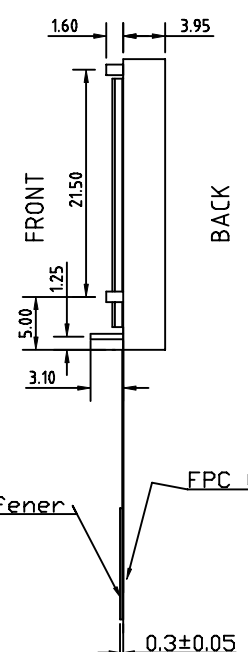


REV	Description	Date
A00	First Issue	2006-JUN-08

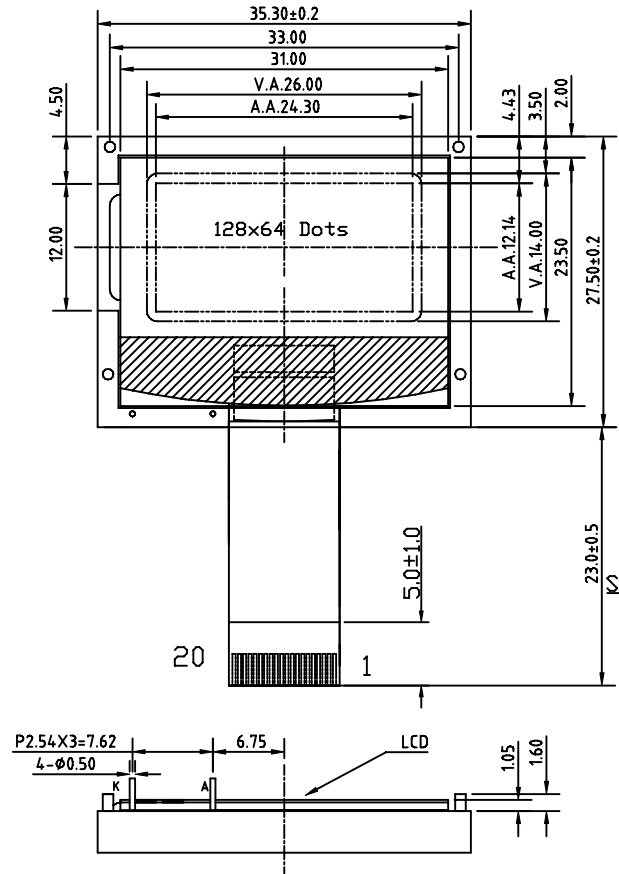

- Specifications:
- 1) FSTN/+VE/B&W/Transflective Mode
 - 2) 1/65 Duty, 1/9 Bias, VLCD= 9.0V
 - 3) Viewing Direction = 6 o'clock
 - 4) Op. Temp.= -20°C To +70°C
St. Temp.= -30°C To +80°C
 - 5) IC=SSD1815, VDD = 3.0~3.6V, Serial I/O
 - 6) With White Led Backlight: 4.0V@15mA

Display Pin Table

1	2	3	4	5	6	7	8	9	10
VSS	/CS1B	/RES	RS	SCLK	SID	VDD	VEE	C3N	C1P
11	12	13	14	15	16	17	18	19	20
C1P	C1N	C2N	C2P	VL2	VL3	VL4	VL5	VL6	INTRS

Backlight Pin Table

A	K
LED+	LED-

Description: **MECHANICAL SPECIFICATIONS**

Scale:

Sheet : 1 of 1

Unspecified Tol. ±0.3 Unit mm

Approvals Date

Draw:

Check:

Approve:

TRI-T COMPANY LIMITED

Project Number: TMGG12864I-03

Item Number:

Do Not Scale This Drawing

Projection